



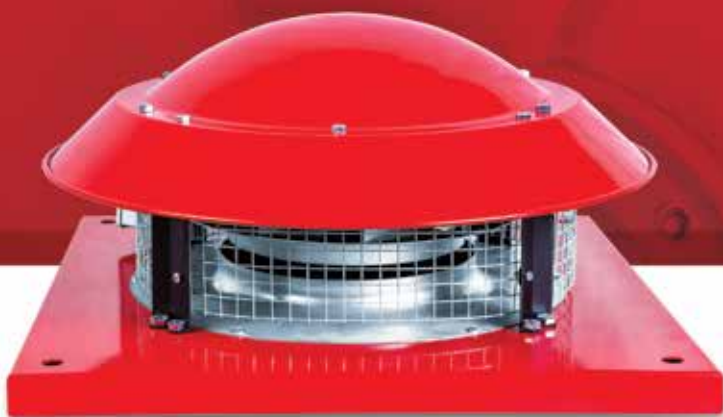


RADIJALNI KROVNI VENTILATOR

Tip	Dimenzije							Napajanje	Frekvencija	Snaga	Struja	Kondenzator	Broj obrtaja	Protok zraka	Nivo buke	Težina
	A	B	C	D	E	F	G									
	mm							V	Hz	Watt	A	uF	o/min	m³/h	(dB)	kg
DČF M 190-2M	252	260	50	140	210	80	25	230	50	80	0,34	2,5	2400	390	53	4
DČF M 225-2M	252	260	50	140	210	80	25	230	50	134	0,58	2,5	2500	950	55	7
DČF M 250-2M	336	386	105	212	274	146	35	230	50	170	0,73	4	2500	1.250	6	8
DČF M 315-2M	370	386	105	225	290	163	35	230	50	143	0,58	4	2400	1.700	54	13
DČF M 355-2M	454	443	135	293	333	185	40	230	50	198	0,86	6	1400	2.500	56	18
DČF M 400-2M	595	595	135	285	450	234	40	230	50	395	1,7	12	1400	3.600	61	22
DČF M 450-2M	664	685	145	355	450	270	40	230	50	730	3,1	12	1400	5.000	63	28
DČF M 500-4T	798	824	155	385	600	320	40	380	50	880	2,3	-	1400	7.800	65	46
DČF M 560-4T	798	824	155	400	600	360	40	380	50	1450	2,8	-	1400	9.800	67	48

- › Jednostavna montaža na kanal.
- › Opcionalno se može regulatorom brzine prilagoditi protok zraka i pritisak.

Zone upotrebe: Može se koristiti za ventilaciju u objektima kao što su tržni centri, bolnice, univerziteti, fabrike, hoteli i druga industrijska mesta.

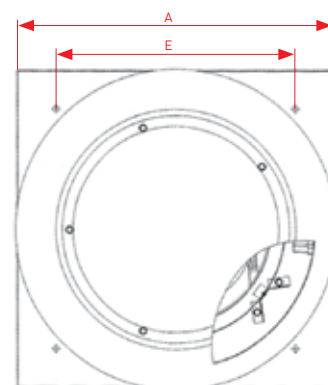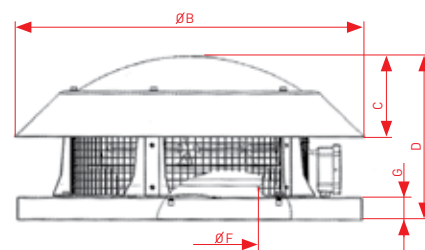

TABELARNI PREGLED UPOREDNI m³/h - Pa											
TIP	Pa	0	100	200	300	400	500	600	700	800	900
DČF M 190-2M	m³/h	390	270	130							
DČF M 225-2M	m³/h	950	750	570	330	110					
DČF M 250-2M	m³/h	1.250	1050	860	660	440	200				
DČF M 315-2M	m³/h	1.700	1000	450							
DČF M 355-2M	m³/h	2.500	1900	1200	350						
DČF M 400-4M	m³/h	3.600	3100	2600	1900	1250	400				
DČF M 450-4M	m³/h	5.000	4400	3600	2700	1700	600				
DČF M 500-4T	m³/h	7.800	7200	6400	5600	4700	3900	2800	1950	700	
DČF M 560-4T	m³/h	9.800	9000	8200	7300	6400	5300	4600	3300	2000	700