



## AV-HPAD Zidna montaža sa lebdećim žaluzinama

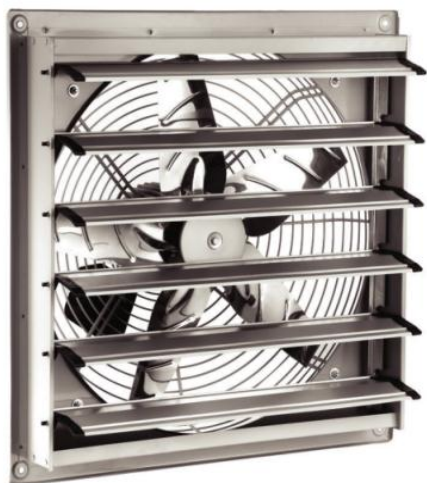

AV-HPAD ventilatori se mogu lako montirati na zid zahvaljujući svom kvadratnom kućištu. Standardni ventilator ima zaštitnu rešetku i praškasti premaz. Lopatice su od nehrđajućeg čelika.



|                         |                            |
|-------------------------|----------------------------|
| MOTOR IZOLACIJSKA KLASA | B CLASS                    |
| STEPEN ZAŠTITE MOTORA   | IP 44                      |
| EFIKASNOST MOTORA       | IE2-IE3                    |
| TIP MOTORA              |                            |
| PROIZVOĐAČ              | GAMAK-VOLT-WATT            |
| KUČIŠTE MOTORA          | GALVANIZED SHEET METAL     |
| BOJA                    | ELEKTROSTATSKO FARBANJE    |
| MATERIJAL ROTORA        | ČELIK                      |
| KLASA ZAŠTITE           | IEC Duty Cycle-S1          |
| RADNA TEMPERATURA       | -20 - +50 °C               |
| DIRECTIVA               | IEC-60335-2-80, ISO 1940-1 |

| MODEL            | NAPON (V) | FREKVENCIJA (Hz) | SNAGA (W) | BR. OBRTAJA (rpm) | PROTOK (m³/h) | NIVO BUKE (dB(A)) |  |
|------------------|-----------|------------------|-----------|-------------------|---------------|-------------------|--|
| AV-HPAD 300-2K-M | 230       | 50               | 215       | 2800              | 4850          | 70                |  |
| AV-HPAD 300-2K-T | 380       | 50               | 135       | 2850              | 5100          | 70                |  |
| AV-HPAD 300-4K-M | 230       | 50               | 130       | 1400              | 2200          | 53                |  |
| AV-HPAD 300-4K-T | 380       | 50               | 125       | 1400              | 2200          | 53                |  |
| AV-HPAD 400-4K-M | 230       | 50               | 200       | 1400              | 4550          | 58                |  |
| AV-HPAD 400-4K-T | 380       | 50               | 180       | 1450              | 4800          | 58                |  |
| AV-HPAD 500-4K-M | 230       | 50               | 230       | 1400              | 6900          | 63                |  |
| AV-HPAD 500-4K-T | 380       | 50               | 220       | 1450              | 7400          | 63                |  |
| AV-HPAD 600-4K-M | 230       | 50               | 560       | 1400              | 10150         | 66                |  |
| AV-HPAD 600-4K-T | 380       | 50               | 450       | 1450              | 10250         | 66                |  |
| AV-HPAD 700-4K-M | 230       | 50               | 750       | 1400              | 13150         | 68                |  |
| AV-HPAD 700-4K-T | 380       | 50               | 870       | 1400              | 13150         | 68                |  |
| AV-HPAD 800-4K-M | 230       | 50               | 1100      | 1400              | 15500         | 72                |  |
| AV-HPAD 800-4K-T | 380       | 50               | 1280      | 1400              | 15500         | 72                |  |

Values are for 0 Pa.

| Tip            | A       | B   | C   | D   | E   |
|----------------|---------|-----|-----|-----|-----|
| AV-HPAD 300-2K | 400X400 | 315 | 300 | 300 | 65  |
| AV-HPAD 300-4K | 400X400 | 315 | 300 | 300 | 65  |
| AV-HPAD 400-4K | 500X500 | 415 | 408 | 400 | 90  |
| AV-HPAD 500-4K | 600X600 | 525 | 495 | 500 | 105 |
| AV-HPAD 600-4K | 700X700 | 630 | 585 | 600 | 110 |
| AV-HPAD 700-4K | 850X850 | 710 | 685 | 700 | 110 |
| AV-HPAD 800-4K | 950X950 | 810 | 785 | 800 | 125 |

### UGRADBENE DIMENZIJE

